


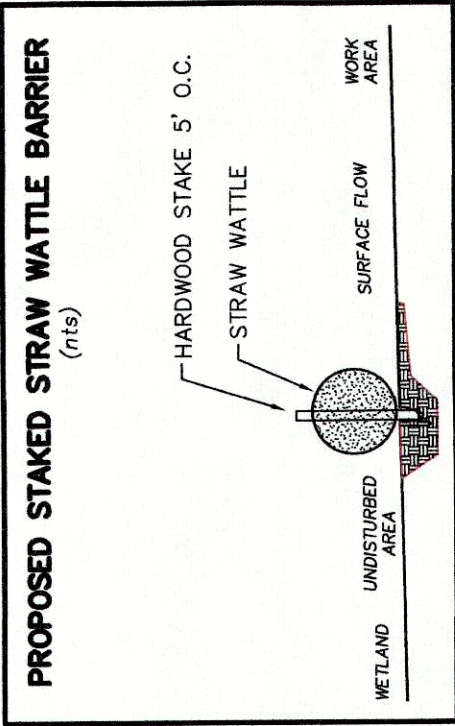


WETLAND PROTECTION MEASURES:

- 1) STAKED STRAW WATTLES SHALL BE INSTALLED AS SHOWN ON THE PLAN. THEY SHALL BE INSPECTED BY THE LOCAL CONSERVATION COMMISSION, IF REQUIRED, BEFORE CONSTRUCTION.
- 2) MAINTAIN THE 100' BUFFER ZONE ALL DISTURBED AREAS MAINTAINED AS SOON AS POSSIBLE.
- 3) ALL DISTURBED AREAS SHALL BE LOAMED, SEEDDED AND MULCHED AS SOON AS POSSIBLE.
- 4) STORAGE OF MATERIAL SHALL BE DOWN HILL OF THE STRAW WATTLES.
- 5) ALL NECESSARY PERMITS SHALL BE OBTAINED BEFORE WORK COMMENCES.
- 6) CONTRACTOR SHALL ADHERE TO ANY ORDERS ISSUED BY THE LOCAL CONSERVATION COMMISSION.

LEGEND

- PROPERTY LINE
- EROSION CONTROL
- EXISTING CONTOUR
- PROPOSED CONTOUR
- WATER LINE
- EDGE OF WETLAND
- EXISTING SPOT GRADE
- PROPOSED SPOT GRADE
- PERC HOLE
- WETLAND FLAG
- WETLAND FLAG

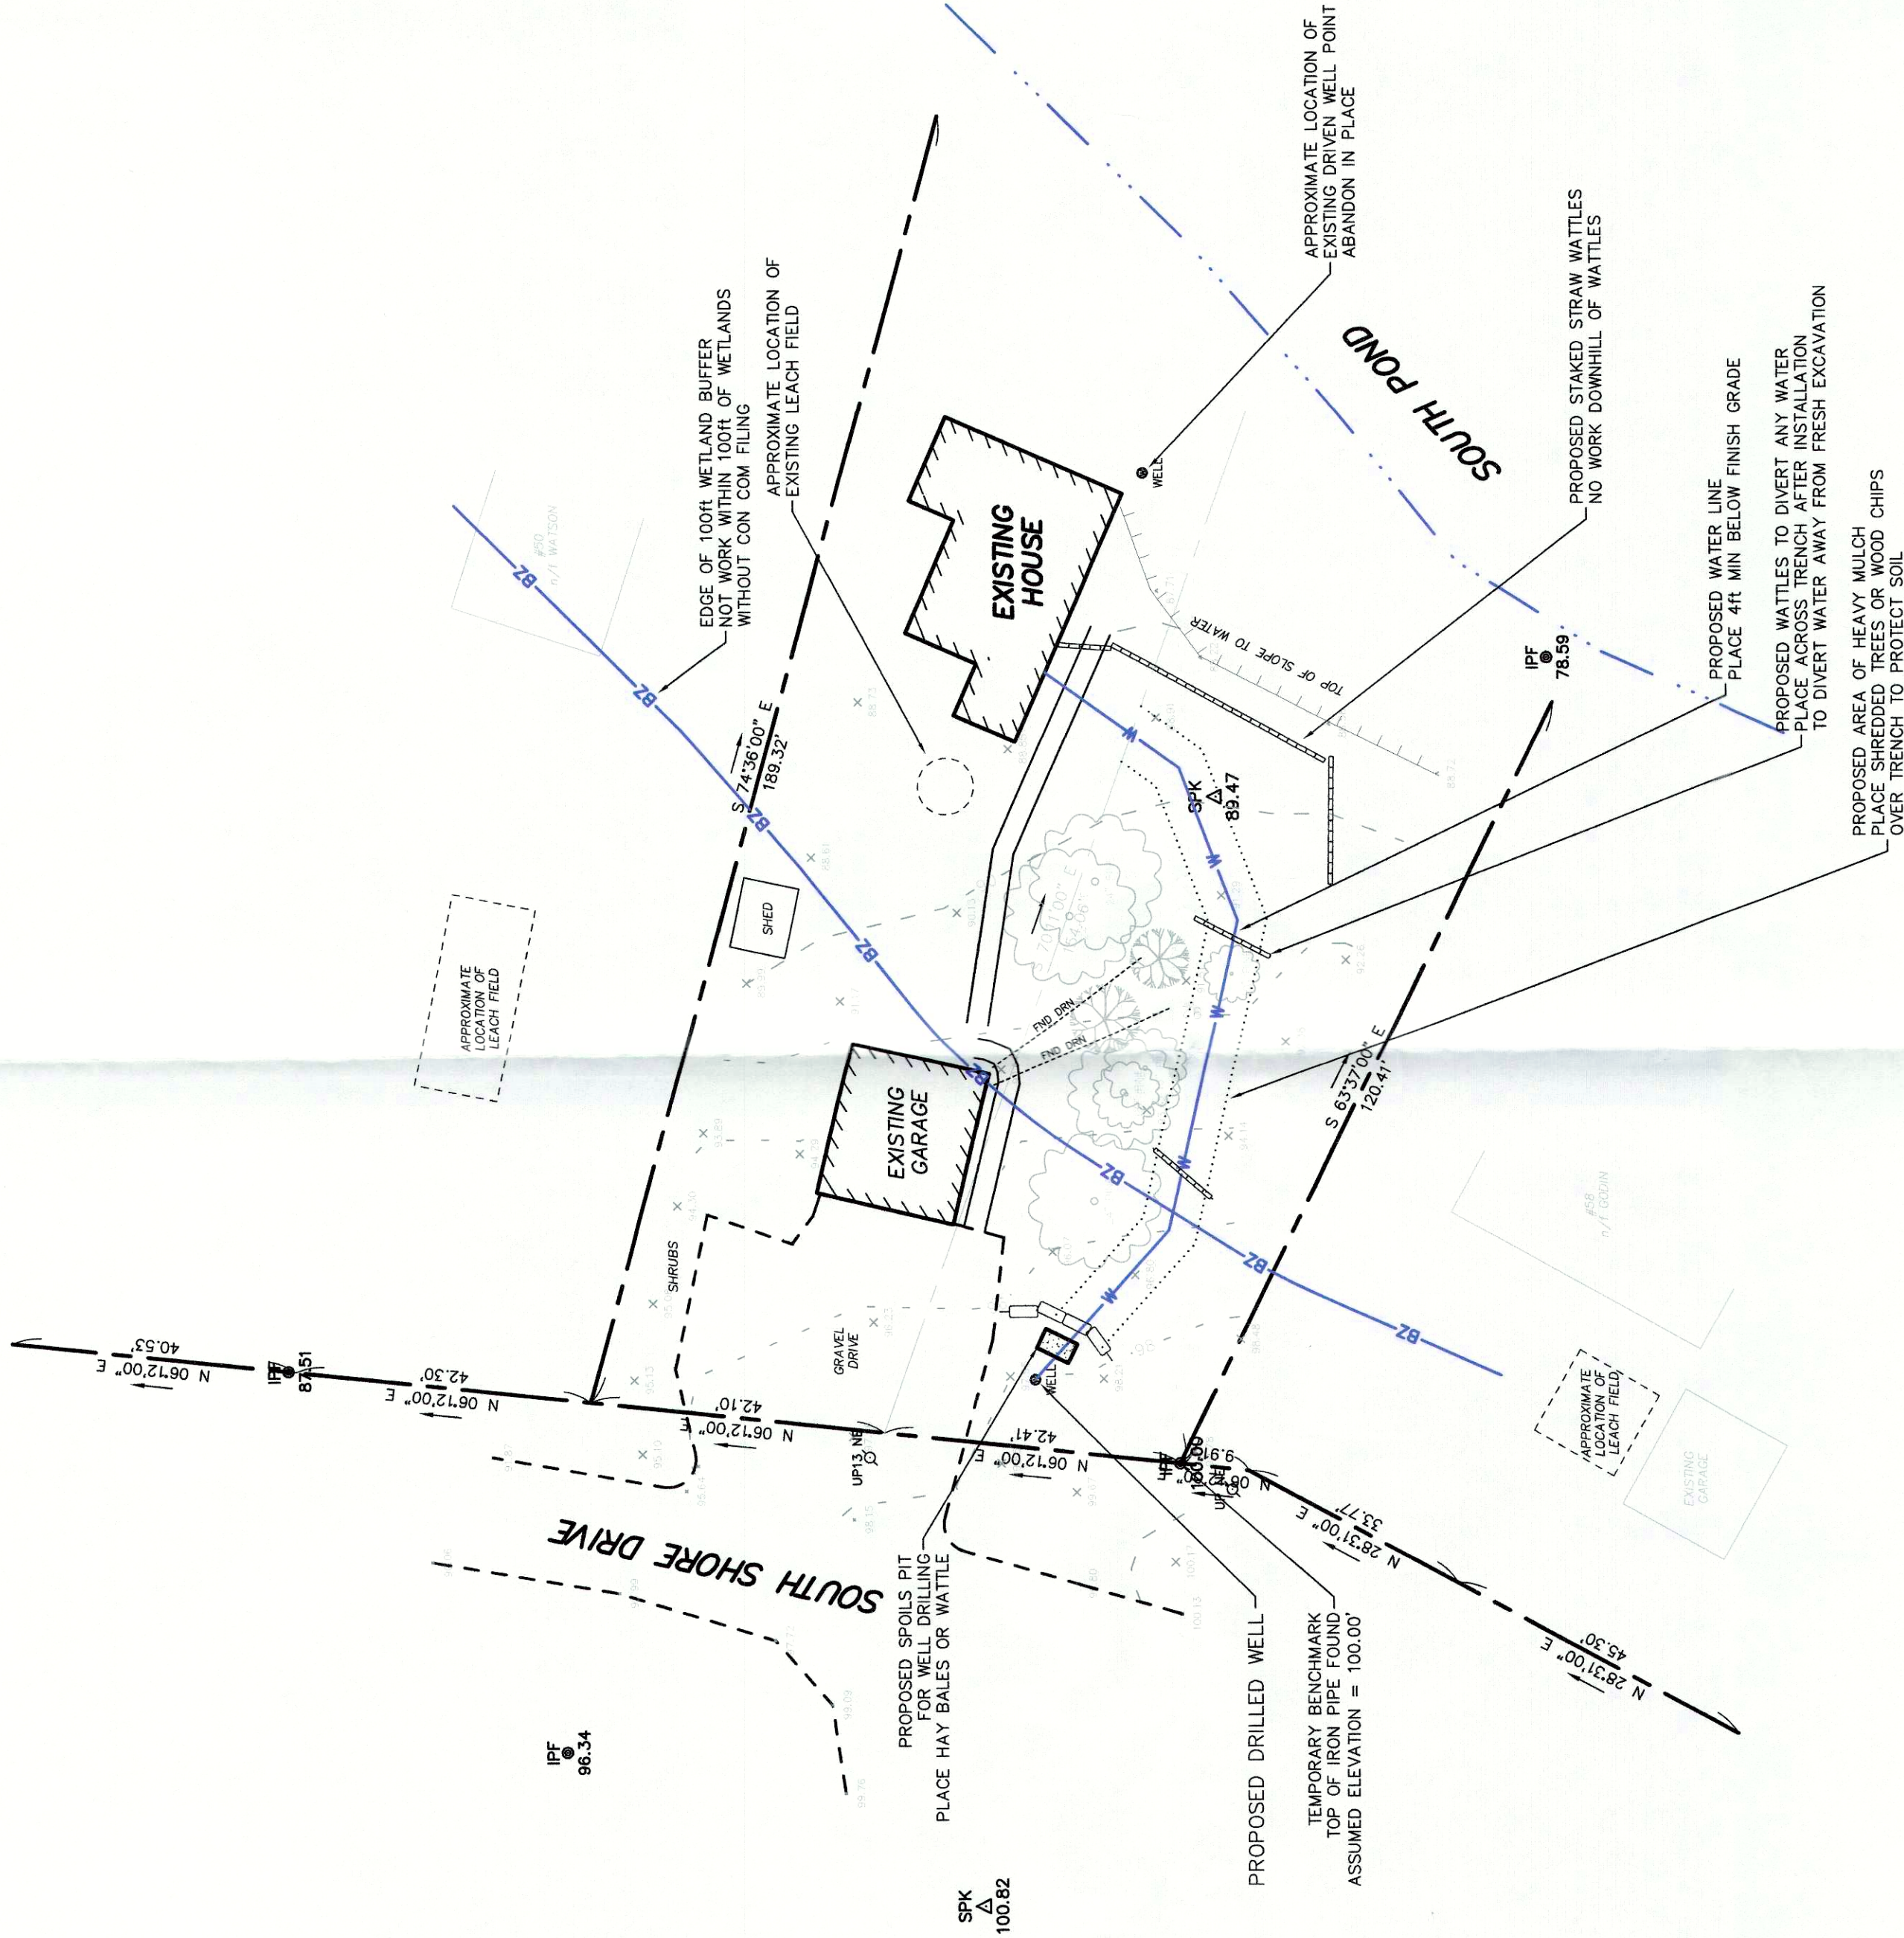

LOCUS MAP



10 MAIN STREET
STURBRIDGE, MA 01566
508-347-5226 (W)
508-347-9857 (F)

WORKING TO PROTECT OUR WATER RESOURCES

PERC TESTING SEPTIC DESIGN WETLAND PERMITTING ENVIRONMENTAL CONSULTING

PROPOSED DRILLED WELL

ALVIN SCHMIDT
52 SOUTH SHORE DRIVE
STURBRIDGE MA
16 MARCH 2018

MAP # PARCEL 52

PROJECT: 2018-016

RECEIVED
MAR 19 2018
CONSERVATION

THIS SYSTEM REQUIRES THE FOLLOWING LOCAL UPGRADE APPROVALS TO TITLE 5 AND/OR LOCAL REGULATIONS:

1. VARIANCE TO 310 CMR 15.029 (1) THE PROPOSED WELL DOES NOT MEET THE REQUIRED SETBACK FROM A LEACH FIELD. 100 FEET REQUIRED, 70 FEET PROVIDED. (N/I GOING)
2. VARIANCE TO 310 CMR 15.029 (1) THE PROPOSED WELL DOES NOT MEET THE REQUIRED SETBACK FROM A LEACH FIELD. 100 FEET REQUIRED, 70 FEET PROVIDED. (N/I GOING)
3. VARIANCE TO 310 CMR 15.029 (1) THE PROPOSED WELL DOES NOT MEET THE REQUIRED SETBACK FROM A LEACH FIELD. 100 FEET REQUIRED, 80 FEET PROVIDED. (N/I WATSON)