

STYK

tap culture coffee

enter

KRUGER MSEP Larry & Gene Basso Erik Refson
Quillet Painting Dorian Living Logan Mackey El Meson Quality Glass
Sterling Mechanical Johnson Fruit Farms Bodo Knitting Plastic Floor
Burkett RTHC Mike Childs **BOYERS CONSTRUCTION** **NOFZIGER** Stripe-it-up D&G Welding
Phillips Plumbing & Heating Yvonne Curlier Twin Cities Landscaping

Thank You!

SPILIGHTING
www.spilighting.com

SMALL + POWERFUL

An essential tool for every designer's toolbox, Styk is the best all-around wall washer/wall grazer on the market.

Equipped with the latest in LED technology, it delivers more lumens and offers better optical control than the competition.

Specify it when lighting signs, murals, artwork, facades, or anywhere an even wash of light is needed.






LEADING-EDGE TECHNOLOGY & PERFORMANCE OPTICS

- Slim 1.5" diameter housing
- Up to 1,450 lm/ft
- 102 lm/W delivered
- Interior or exterior
- IP66-rated LED light engine
- Anodized finish provides durable corrosion protection
- 1' to 8' lengths and continuous runs


3 OPTICAL DISTRIBUTIONS

Rotates 330° and locks into place for precise fixture alignment.




FT

Forward Throw



SMA

Symmetric
60° Beam
120° Spread




SMB

Symmetric
30° Beam
60° Spread

STYK - WALL

Catalog ID	Size	Wattage	Delivered Lumens*
	1'	4	407
		7	712
		14	1,424
	2'	8	814
		14	1,424
		28	2,848
STEM			
SIW12139 (interior)	3'	12	1,220
		21	2,136
SEW12146 (exterior)		42	4,271
	4'	16	1,627
		28	2,848
		56	5,695
BRACKET			
SIW12138 (interior)	5'	20	2,034
		35	3,560
SEW12145 (exterior)		71	7,221
	6'	24	2,441
		42	4,271
		85	8,645
	8'	32	3,254
		56	5,695
		113	11,492

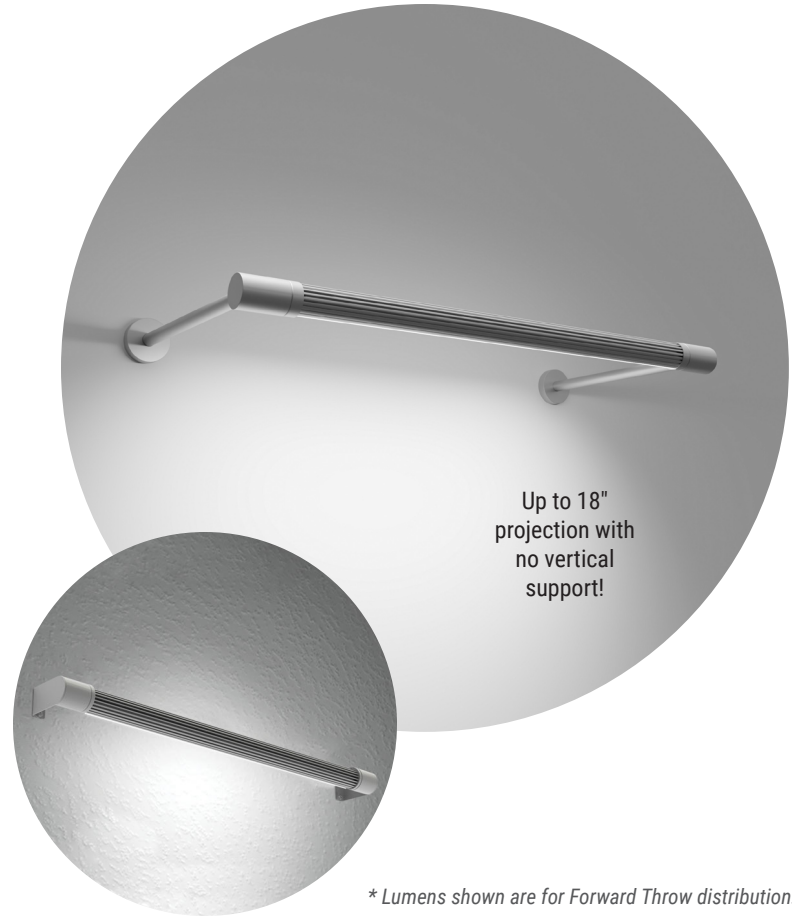

* Lumens shown are for Forward Throw distribution.
See website for other optical distributions.

STYK - SUSPENDED



Catalog ID	Size	Wattage	Delivered Lumens*
	1'	4	407
		7	712
		14	1,424
	2'	8	814
		14	1,424
		28	2,848
SIP12122 (interior)	3'	12	1,220
		21	2,136
		42	4,271
SEP12144 (exterior)	4'	16	1,627
		28	2,848
		56	5,695
	5'	20	2,034
		35	3,560
		71	7,221
	6'	24	2,441
		42	4,271
		85	8,645
	8'	32	3,254
		56	5,695
		113	11,492

* Lumens shown are for Forward Throw distribution.
See website for other optical distributions.


STYK - CEILING

Catalog ID	Size	Wattage	Delivered Lumens*	
SIC12136 (interior)	1'	4	407	
		7	712	
		14	1,424	
	2'	8	814	
		14	1,424	
		28	2,848	
	3'	12	1,220	
		21	2,136	
		42	4,271	
	SEC12142 (exterior)	4'	16	1,627
			28	2,848
			56	5,695
5'	20	2,034		
	35	3,560		
	71	7,221		
6'	24	2,441		
	42	4,271		
	85	8,645		
8'	32	3,254		
	56	5,695		
	113	11,492		



* Lumens shown are for Forward Throw distribution.
See website for other optical distributions.

STYK - COVE

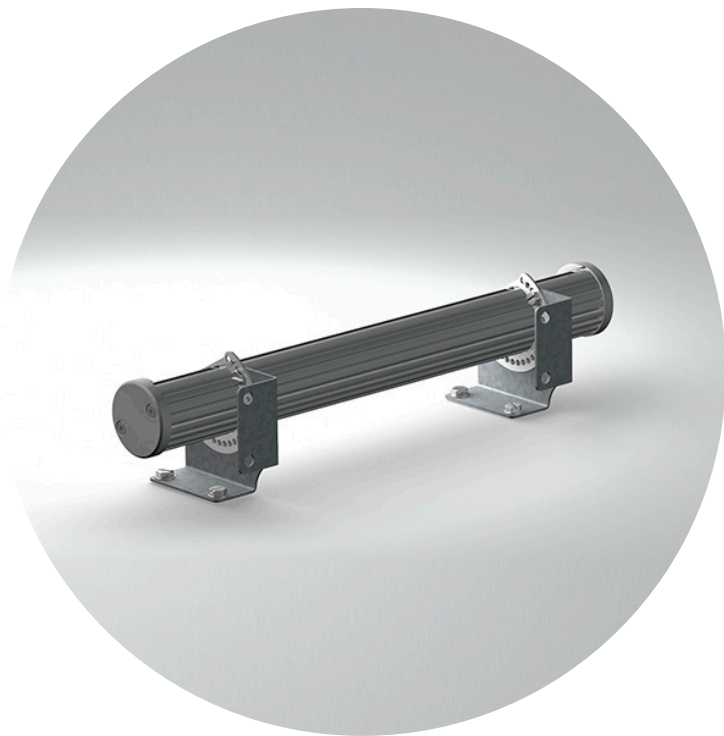


Catalog ID	Size	Wattage	Delivered Lumens*
	1'	4	407
		7	712
		14	1,424
	2'	8	814
		14	1,424
		28	2,848
	3'	12	1,220
		21	2,136
		42	4,271
SIV12141 (interior)	4'	16	1,627
SEV12148 (exterior)		28	2,848
		56	5,695
	5'	20	2,034
		35	3,560
		71	7,221
	6'	24	2,441
		42	4,271
		85	8,645
	8'	32	3,254
		56	5,695
		113	11,492

* Lumens shown are for Forward Throw distribution.
See website for other optical distributions.

ECHO PERFORMANCE COVE 6.0

Catalog ID	Size	Wattage	Delivered Lumens*
EIV12014	2'	8	814
		14	1,424
		28	2,848
EIV12015	3'	12	1,220
		21	2,136
		42	4,271
EIV11814	4'	16	1,627
		28	2,848
		56	5,695
EIV12016	5'	20	2,034
		35	3,560
		71	7,221
EIV12017	6'	24	2,441
		42	4,271
		85	8,645
EIV12018	8'	32	3,254
		56	5,695
		113	11,492

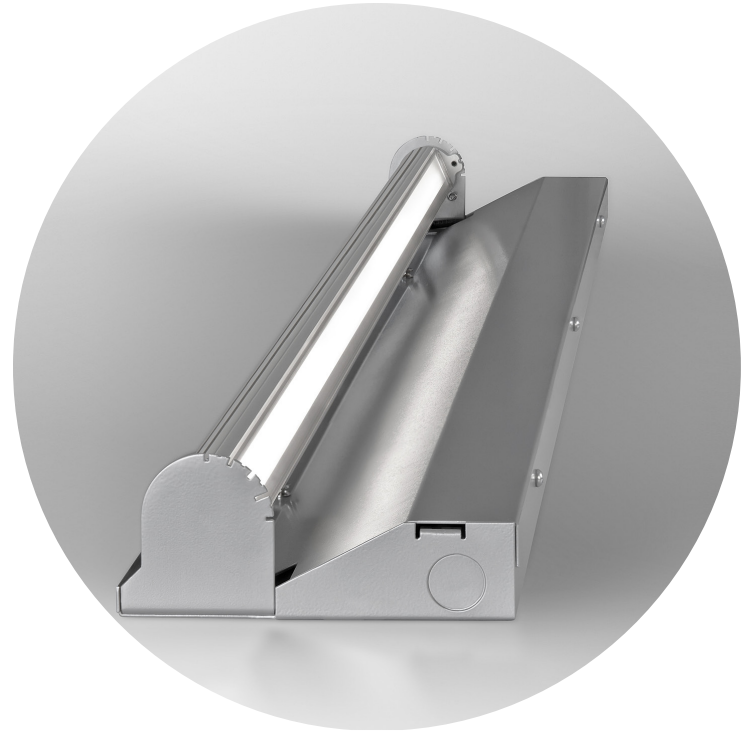

* Lumens shown are for Forward Throw distribution.
See website for other optical distributions.

FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____



AC Zolo™ 7

LINE VOLTAGE WASHER/GRAZER

Store in a Temperature-Controlled Environment.



I Description


The AC Zolo 7 is the first line voltage option in our flagship grazing series. Available with a variety of optics, accessories, and color temperature options without the need for remote drivers.

I Dimensions

Length	Variable (see below)
Width	1.97" (50mm)
Height	2.70" (69.3mm)


I Features

- High Purity Tempered Glass
- Extruded Aluminum Alloy Housing
- Available in Titanium Gray, Black, or White Finish*
- Daisy Chain Multiple Fixtures
- IP66 Outdoor Rated
- Louver Options Available

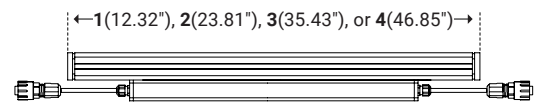

I Specifications

Input Voltage	120-277VAC
Color Options	2700K, 3000K, 3500K, 4000K
Watts per Foot	9W/ft
Lumen per Watt	100 lm/W
Lumen per Foot	900 lm/ft
Beam Spread	10°x55°, 20°x40°, 13°, 20°, 25°, 35°, 50°
Max Run Length	75ft at 120V AC 125ft at 277V AC
CRI	80*
Dimming Options	0-10V, DMX, DALI, ON/OFF
Operating Temp. Range	-40°F (-40°C) to 140°F (60°C)

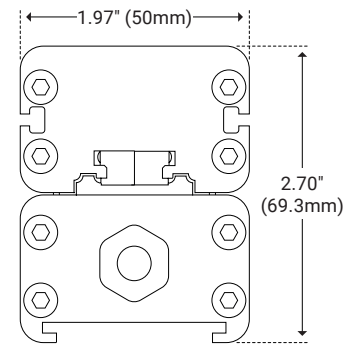

* Customizable—Consult Factory



I Ordering Code Builder

Item	Length	Power	Fixture Type	Dimming
Z7AC		9	W	
Z7AC – AC Zolo 7	1 – 12.32" (313mm) 2 – 23.81" (605mm) 3 – 35.43" (900mm) 4 – 46.85" (1190mm)	9 – 9W/ft	W – White Light	Z – 0–10V X – DMX D – DALI F – ON/OFF
Color*	Beam Angle	Mounting	Finish*	Option
27 – 2700K 30 – 3000K 35 – 3500K 40 – 4000K	1055 – 10°x55° 2040 – 20°x40° 13 – 13° 20 – 20° 25 – 25° 35 – 35° 50 – 50°	S2 – 2" Stand Off S3 – 3" Stand Off GS – Ground Stake L3 – L Bracket	TG – Titanium Gray BK – Black WH – White	NA – None LV – Louver ALV – Asymmetric Louver

Example: Z7AC-1-9-W-Z-27-1055-S2-TG-LV


* Customizable—Consult Factory

I Mounting

2" Stand Off




Unit Number	Z-07-S2
Ordering Code	S2
Foot Length	1.18" (30mm)
Foot Width	2.36" (60mm)
Stand Off Height	1.83" (46.4mm)

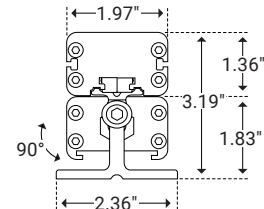

3" Stand Off




Unit Number	Z-07-S3
Ordering Code	S3
Foot Length	1.18" (30mm)
Foot Width	2.36" (60mm)
Stand Off Height	2.59" (66mm)

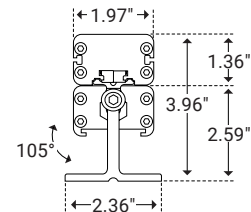


Ground Stake




Unit Number	Z-07-GS
Ordering Code	GS
Stake Length	8.23" (209mm)
Stake Width	1.96" (50mm)



L Bracket




Unit Number	Z-07-L3
Ordering Code	L3
Foot Length	1.18" (30mm)
Foot Width	2.36" (59.9mm)
Stand Off Height	2.64" (66.9mm)

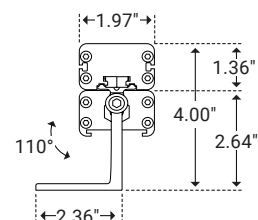




I Glare Options

Louver




Unit Number	Z-07-LV
Ordering Code	LV
Louver Width	2.10" (53.3mm)
Louver Height	0.78" (20mm)
Overall Height	1.29" (33mm)



Asymmetric Louver



Unit Number	Z-07-ALV
Ordering Code	ALV
Louver Width	2.10" (53.3mm)
Louver Height	0.78" (20mm)
Overall Height	1.29" (33mm)




I Power & Connectors

Power Lead



Unit Number	Length
Z-7AC-FML-6	6ft
Z-7AC-FML-20	20ft
Z-7AC-FML-50	50ft



Connector




Unit Number	Length
Z-7AC-FMC-1	1ft
Z-7AC-FMC-2	2ft
Z-7AC-FMC-6	6ft



T-Connector




Unit Number	Z-7AC-TCONNECTOR
-------------	------------------

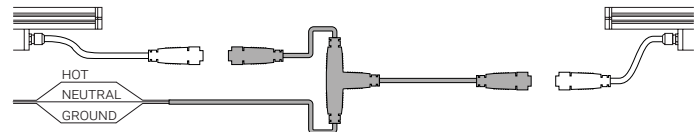

End Cap




Unit Number	Z-7AC-END-DMX
	Z-7AC-END






I Wiring Options


0-10V

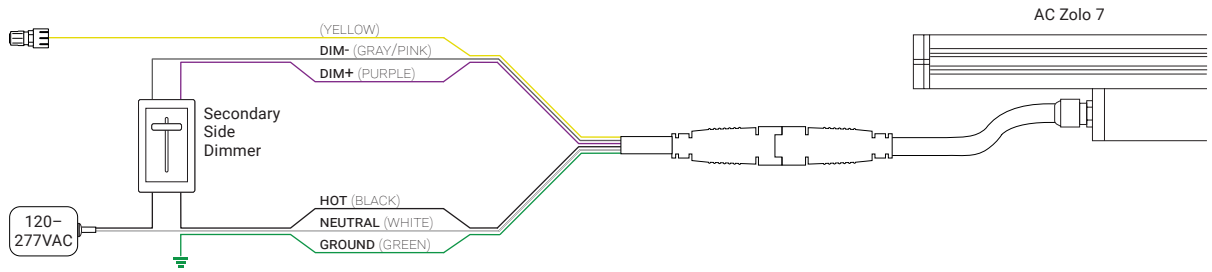


DMX

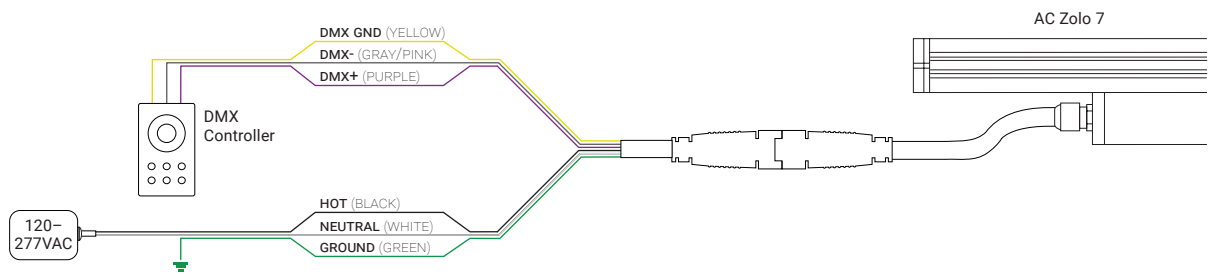

DALI

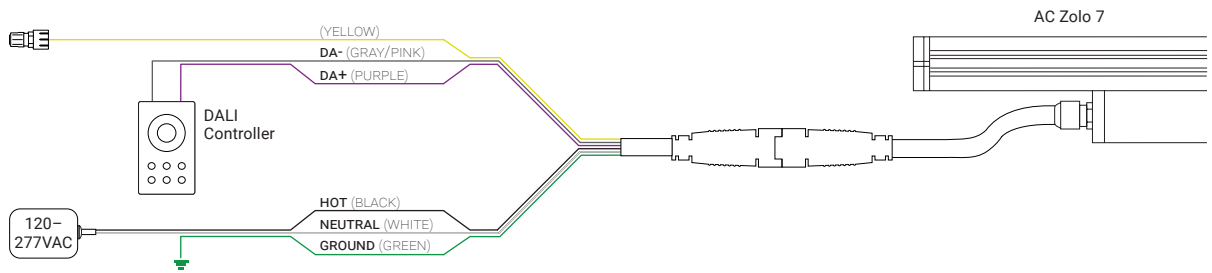


ON/OFF

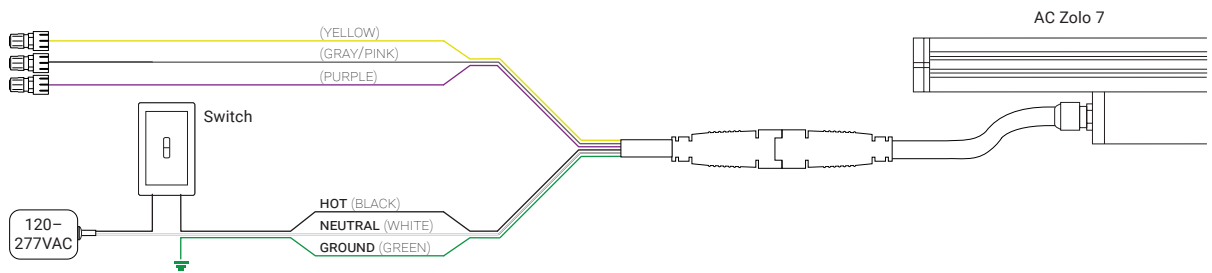

I Daisy Chain

Multiple Fixtures

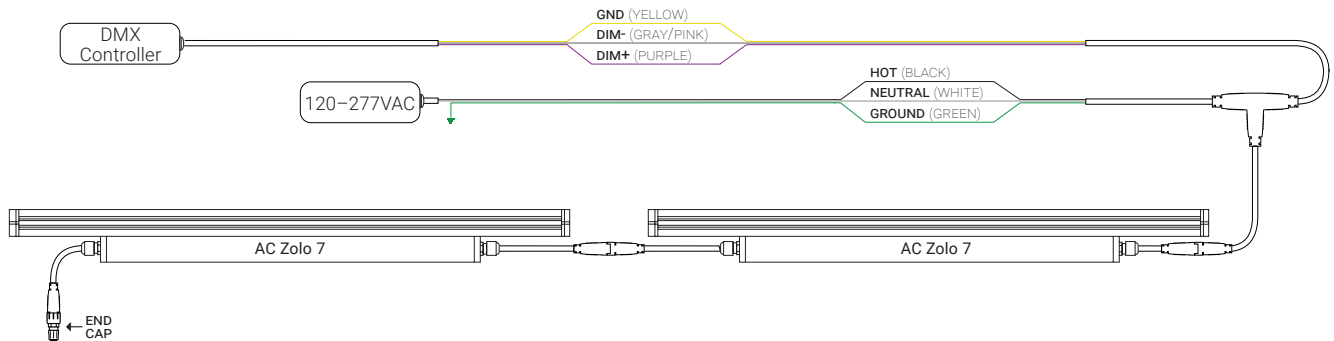

Multiple Power Sources

