


Pole Sign - (1) Fixture per side

Units Feet - Footcandles V			
onics Freet - Pootcand	(E) V		
Point Spacing X		ft	
Point Spacing Z		ft	
Surface			
Width [X]*	8	ft	
Height [Z]*	4	ft	
Base [Z]	5	ft	
Criteria			
Setback*	2	ft	
Average		fo	
Minimum		fo	
Ave / Min			
Max / Min			
Constraints			
Quantity	1		
On Center Spacing		ft	
Target Area			
Width [X]		ft	
Height [Z]		ft	
Center Offset X		ft	
Center Offset Z		ft	

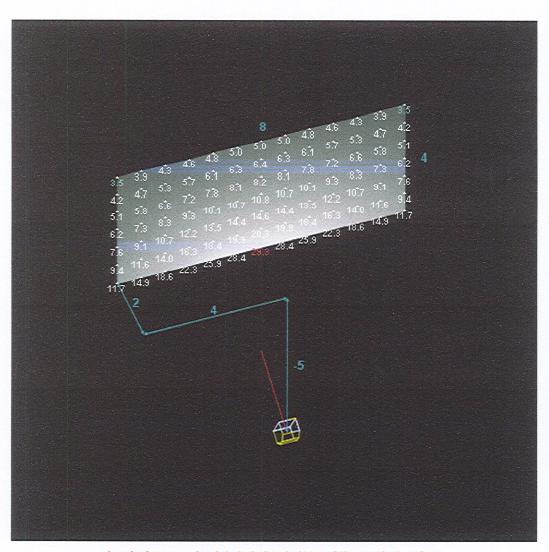

Spacing Results [B]				
	SUI	ts [I	_	
Spacing		8 ft		
Quantity		1		
Tilt			120°	
Calculation Results [B]				
Minimum		3.5 fc		
Average		10.5 fc		
Maximum		29.3 fc		
Ave / Min		3		
Max / Min			8.4	
Point Spacing		.7 x .7 ft		
Fixture to Surface Eff. 3.5%				
Lamp to Surface Eff. 3.4%				
iterations		1		
Points Calculated		1,982		
Display				
Points <				
0.2				
[B]	6# 585 666 6666 6666			
✓	0.5	fc		
✓	1	fc		
✓	2	fc		
✓	5	fc		

Luminaire normal points to below bottom of the vertical surface

Project Information