

RECEIVED

JAN 19 2021

DESIGN REVIEW
COMMITTEE



PROPOSED RAPSCALLION and HOMEFIELD SIGNAGE


3 ARNOLD ROAD, STURBRIDGE, MA



– EXISTING HOMEFIELD SIGN, WEST ELEVATION –



– PROPOSED RAPSCALLION and HOMEFIELD SIGN, WEST ELEVATION –

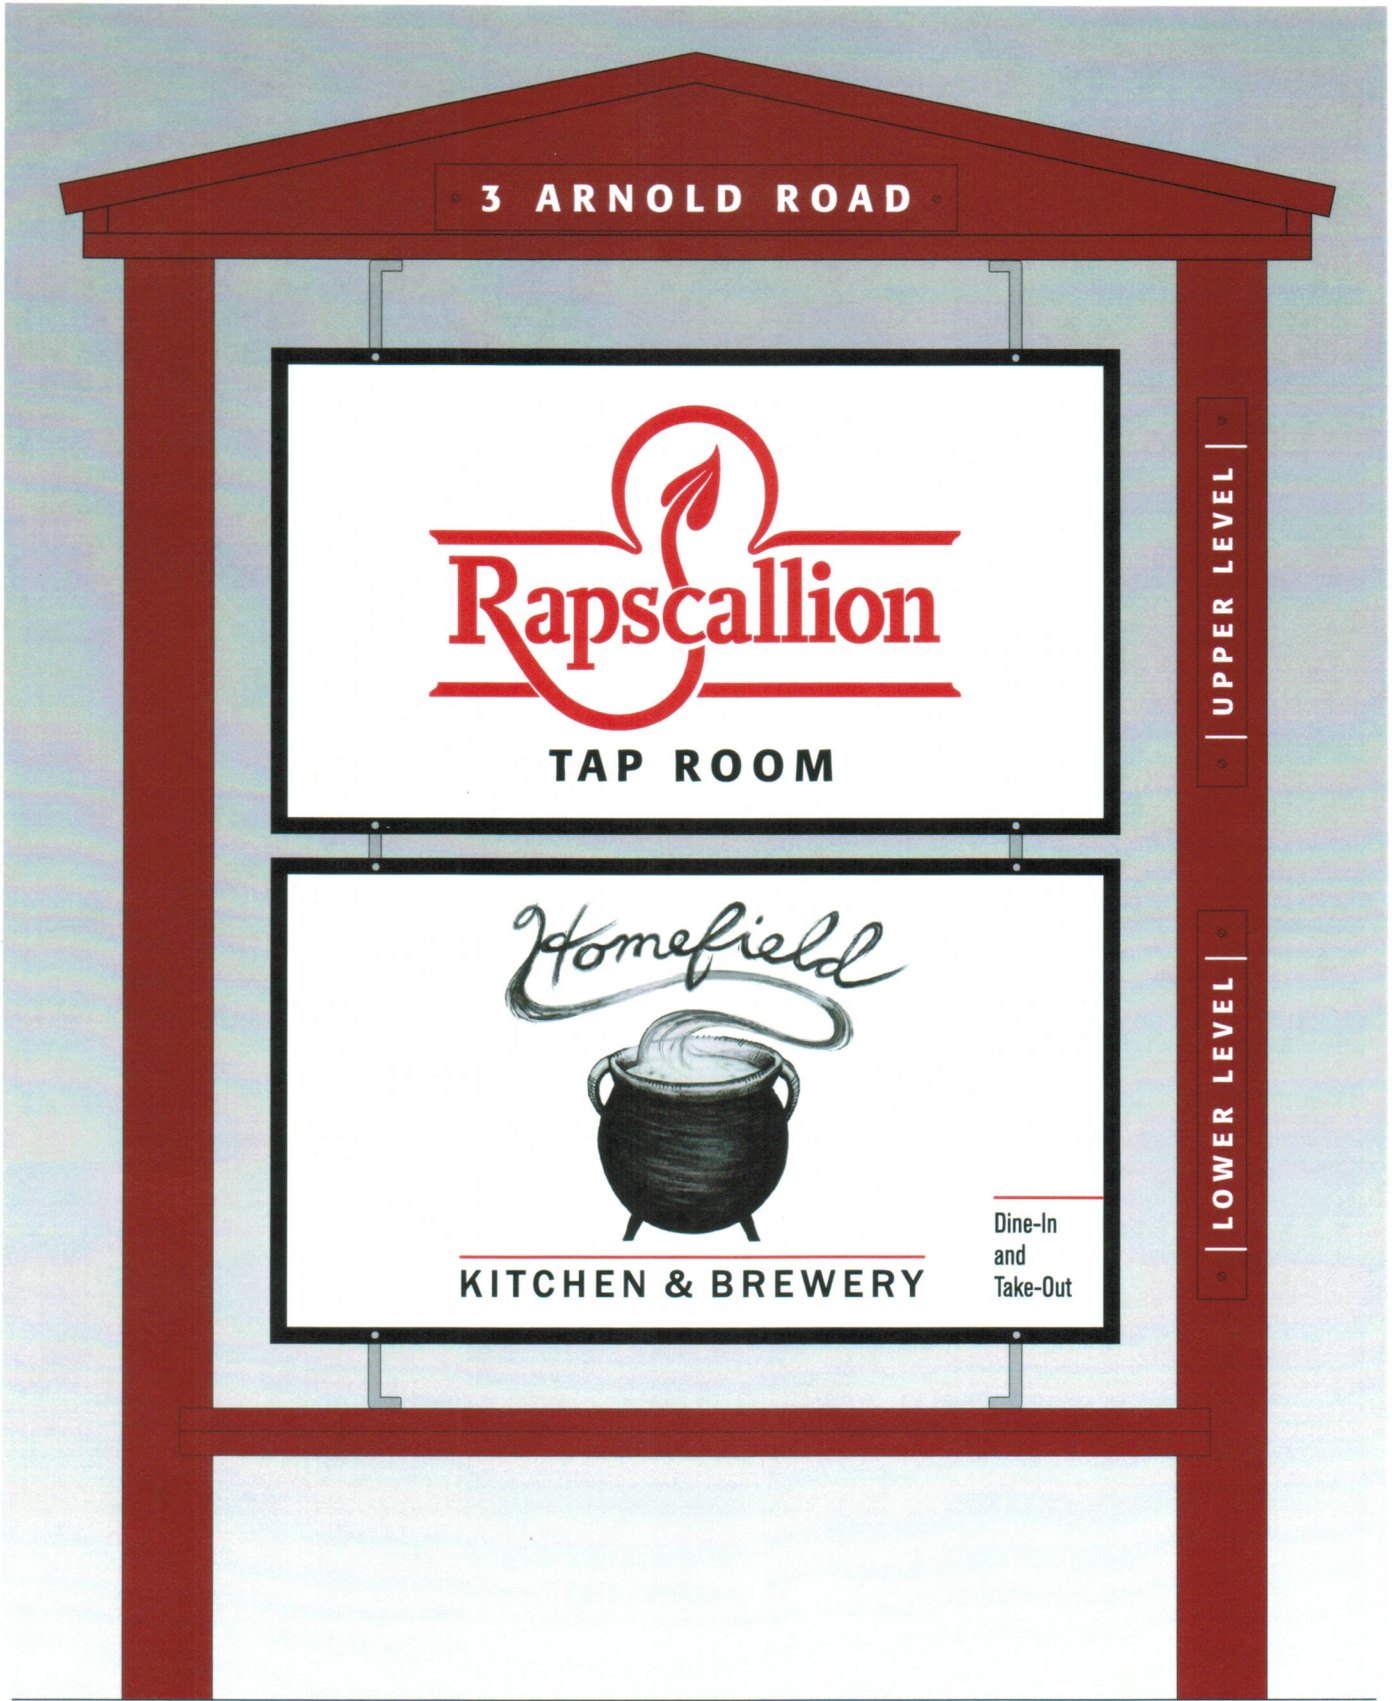

- EAST ELEVATION -

3 ARNOLD ROAD

UPPER LEVEL



TAP ROOM

LOWER LEVEL


Homefield



KITCHEN & BREWERY

Dine-In
and
Take-Out

- WEST ELEVATION -

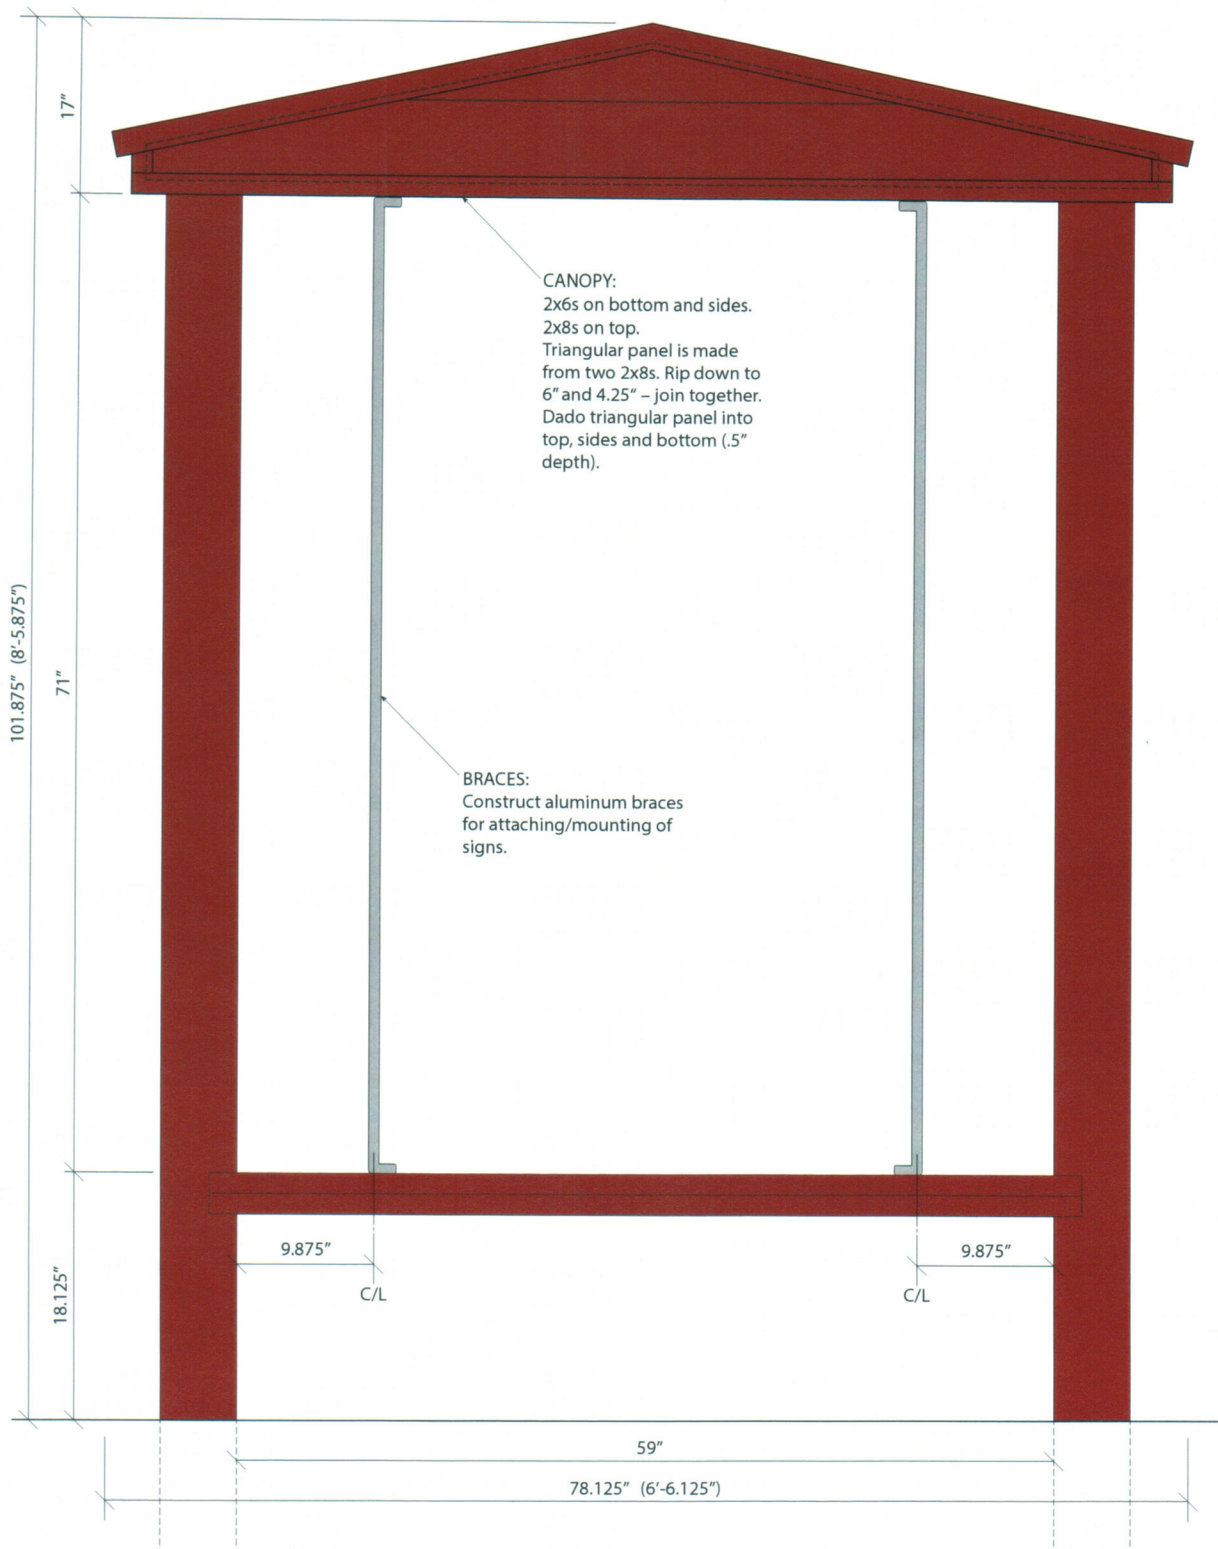

- ELEVATION, SIGN FRAMING -

- GENERAL NOTES -

FRAME CONSTRUCTION

Existing sign to be removed and replaced with all new pressure treated lumber (see Elevation Drawings).

Posts: 6x6 Pressure-treated – Set in concrete to meet building codes.

Canopy: combination of 2x4 and 2x8 construction.

Cross-member: (running below signs and between posts) – Two 2x6s screwed together, Pressure-treated, dado into posts.

Build aluminum braces to attach signs: 3/4" stock.

Paint all pressure-treated to match the building.

SIGNS

Material for all signs: 6mm DieBond, Vinyl Applique. Artwork provided for each.

BATCH ONE

Provide four main signs – 52"W x 30"H.

Two signs required for RapsCALLION (these 2 signs are identical), and two signs required for Homefield (these 2 signs are identical). These main signs have graphics on one side only and will be mounted back-to-back, respectively (see Elevation Drawings). Signs will be mounted/attached to custom-made aluminum bracing.

BATCH TWO

Provide four "LEVEL" signs – 24"W x 3"H.

Two signs required for UPPER LEVEL (these 2 signs are identical), and two signs required for LOWER LEVEL (these 2 signs are identical). These signs have graphics on one side only and will be mounted on opposite sides of the north post. (see Elevation Drawings).

BATCH THREE

Provide two "3 ARNOLD ROAD" signs – 32"W x 4"H.

These 2 signs are identical. These signs have graphics on one side only and will be mounted on opposite sides of the canopy. (see Elevation Drawings).

Attach all signs with stainless steel hardware.

ELECTRICAL AND LIGHTING

Run new 20-amp line from existing electrical panel.

Trench and provide conduit to meet building codes.

Two LED lighting fixtures to be provided – one fixture on west face of sign and one fixture on east face of sign.

Fixtures to be mounted to 4" box on underside of canopy.

Lighting will be directed downward to illuminate both signs on each face.